


AVS-313

INTEGRATED PROJECTOR CONTROLLER SWITCHER

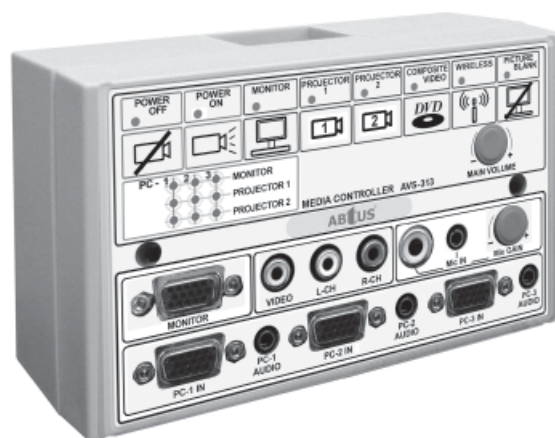


DESCRIPTION

The ABTUS AVS-313 Media Control Panel is one of the most user friendly and installer friendly, preprogrammed controller specifically designed for an easy and central control of any two projection system as well as a monitor out. It removes the need for over-complicated and multiple remote control handsets. With the 3x3 VGA/Audio matrix switching, user are now free to project any VGA image to any output display (monitor, projector 1 and projector 2) accordingly. Ideal for Lab or training room with dual projection application.

FEATURES

- Simple to used with one to one function controlled button
- Fully self contained / integrated Projector Controller with AV switcher VGA Matrix switching
- Supports 3x3 VGA matrix switching with resolutions from VGA to SXGA
- Easy Installation with standard 2.54mm connector and cabling

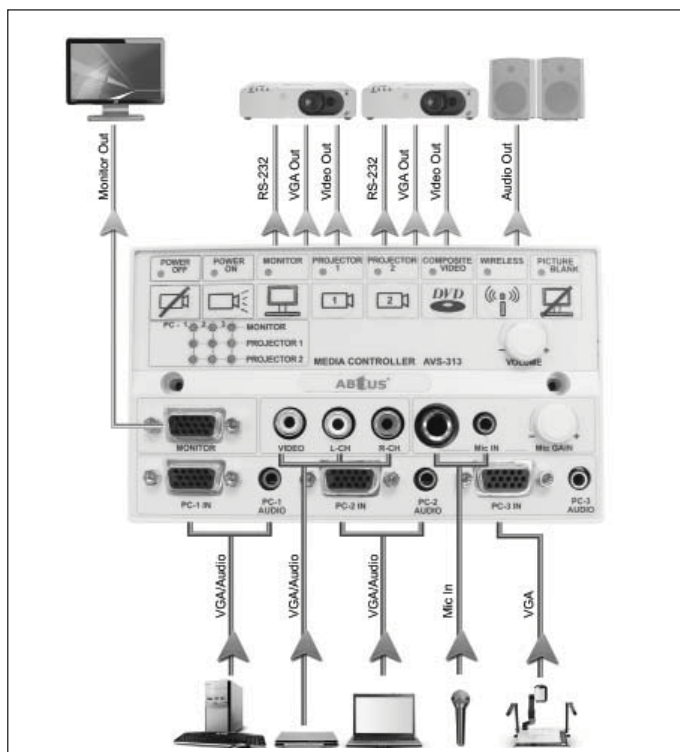

TYPICAL APPLICATIONS

Any professional presentation system requiring multiple AV Inputs of all different type of Video standard and a standard projector controller.

- Schools (Media Classroom) • Churches • Corporate Applications (Training Room)

TECHNICAL SPECIFICATION

INPUT:	3 x PC Input [*D-Sub 15pin] 3 x PC-Audio [*3.5mm] 1 x C-Video [*RCA] 1 x Stereo Audio [*RCA] 1 x Stereo Audio [*2.54mm connector, feedback from projector] 1 x Microphone [*3.5mm] 1 x Microphone [*6.3mm]
OUTPUT:	2 x VGA Output [*standard 2.54mm connector for Projector] 1 x VGA output [*D-Sub 15pin for monitor] 2 x C-Video [*standard 2.54mm connector] 1 x Main Stereo Audio [*standard 2.54mm connector] 2 x Tx [*standard 2.54mm connector]
VGA BANDWIDTH:	3-in 3-out VGA Matrix Switcher Distribution Amplifier (900MHz R+G+B)
MAX RESOLUTION:	1280 x 1024
ALL CABLE LENGTH:	Up to 28 meter
CONFIGURABLE	1:2 x RS-232 (8 Data Bit and 1 Stop Bit)
COM PORT:	Baud Rate (1200 to 115200) Parity Bit (Non, Even or Odd) Programmable projector protocol
DELAY TIME:	Projector "ON/OFF" delay time [*in sec] 1 to 99
CONTROL BUTTON:	Number of user defined "Control Button" x 8 Available protocol for each "Control Button" x 2
VIDEO SELECTION:	All Video/VGA Input Switching Digital
AUDIO SELECTION:	Audio Input Switching Digital
VOLUME:	Main Volume Control Analog
MIC GAIN:	Microphone Input Gain Control Analog
POWER ADAPTOR:	12V-DC, 500mA
HOUSING:	ABS Enclose
DIMENSIONS:	149 x 88 x 48 mm (Standard UK two gang casing)
WEIGHT:	350g

* Specifications are subject to change without notice.