


AVS-315+ PLUS

INTEGRATED PROJECTOR CONTROLLER SWITCHER

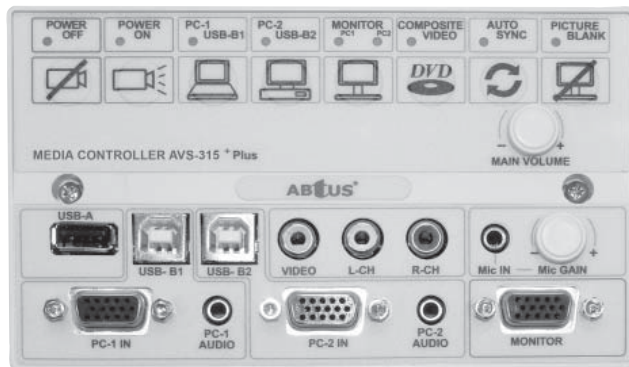


DESCRIPTION

The ABtUS 315 plus Media Control Panel is one of the most user friendly and installer friendly, preprogrammed controller specifically designed for a easy and central control of any AV projection system with interactive through USB. It removes the need for over-complicated and multiple remote control handsets. With the 2:1 USB-B switcher, switcher for projection with interactive can now be done with just a push of a button.

FEATURES

- Simple to used with one to one function controlled button
- Works well with any monitors, projectors as well as interactive system
- Supports 2x2 VGA matrix switching
- Easy Installation with standard 2.54mm connector and cabling
- Fully self contained / integrated Projector Controller with AV switcher
- Build in USB buffer with best connective for interactive system and USB thumb drive

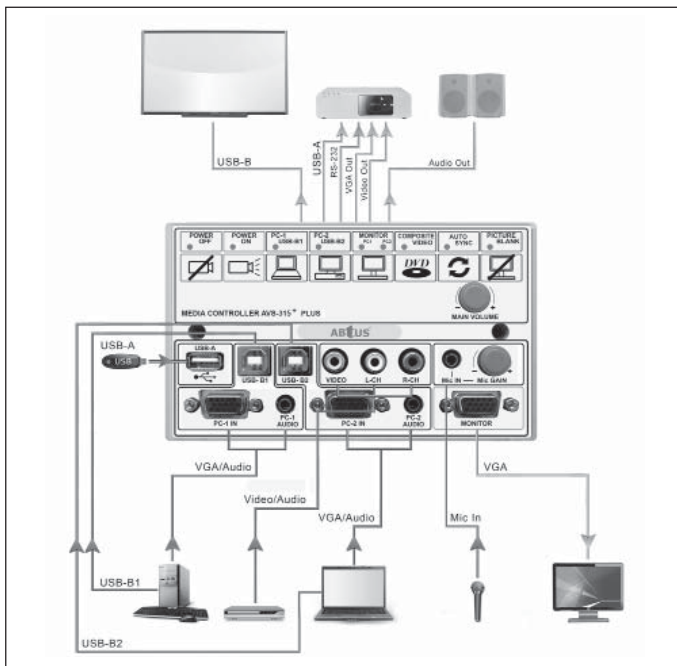

TYPICAL APPLICATIONS

Any professional presentation system requiring multiple AV Inputs of all different type of Video standard and a standard projector controller.

- Schools (Media Classroom) • Churches • Corporate Applications (Meeting Room)

TECHNICAL SPECIFICATION

- INPUT:** VGA Input x 2 (*D-Sub 15pin)
 PC-Audio x 2 (*3.5mm)
 C-Video x 1 (*RCA)
 Stereo Audio x 1 (*RCA)
 Microphone x 1 (*3.5mm)
 USB-B x 2 (Switcher with build in buffer)
 USB-A x 1 (for Thumb Drive with build in buffer)
- OUTPUT:** 1 x VGA (*standard 2.54mm connector for Projector)
 1 x VGA output (*D-Sub 15pin for monitor)
 1 x C-Video (*standard 2.54mm connector)
 1 x Main Stereo Audio (*standard 2.54mm connector)
 1 x Tx (*standard 2.54mm connector)
 USB-B x 1
 USB-A x 1

VGA BANDWIDTH: 2x2 VGA Matrix Switching
 900MHz (R+G+B)

MAX RESOLUTION: 1280 x 1024

ALL CABLE LENGTH: Up to 28 meter

CONFIGURABLE 1 x RS-232 (8 Data Bit and 1 Stop Bit)

COM PORT: Baud Rate (1200 to 115200)
 Parity Bit (Non, Even or Odd)

DELAY TIME: Projector "ON/OFF" delay time (*in sec) 1 to 99

CONTROL BUTTON: Number of user defined "Control Button" x 8

Available protocol for each "Control Button" x 1

With LED indication and buzzer for confirmation

LED: All Video/VGA/USB Input Switching Digital

AUDIO SELECTION: Audio Input Switching Digital

VOLUME: Main Volume Control Analog

MIC GAIN: Microphone Input Gain Control Analog

POWER ADAPTOR: 12V-DC, 500mA

HOUSING: ABS Enclose

DIMENSIONS: 149 x 88 x 48 mm

WEIGHT: 350g

* Specifications are subject to change without notice.

ABtUS